


Standard Flange Adaptors NP10

Specifications

Working Pressure-	10 bar
Test Pressure-	15 bar
Pipe O/D's-	Flange adaptors can be manufactured to suit any pipe O/D / flange drilling
Notching-	Some items may require notching of the end rings for harnessing, flange adaptors do not resist end load - adequate restraint must be provided

Materials

End Rings-	1. Mild Steel to BS EN10025
Sleeves-	2. Mild Steel to BS EN10025
Studs / Nuts / Washers-	3. Grade 8.8 / B7 Galvanized
Gaskets-	4. EPDM rubber 70 IRHD
Flanges-	5. Mild Steel to BS EN10025
Coating-	Fusion Bonded Epoxy - Resicoat R4

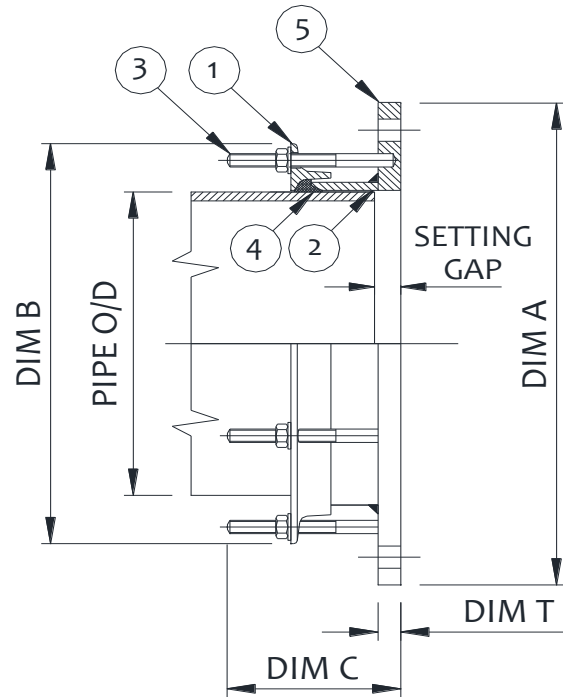

Pipe O/D	To Suit	Flange O/D Dim A	Flange Thk Dim T	End Ring Dim B	Overall Dim C	Flange Details			Setting Gap		No of Notches	No of Bolts	Bolt Dia / Length
						No of holes	Dia	PCD	Min	Max			
326	CS/DI	445	25	418	149	12	22	400	25	50	4	6	M12 x 140
358	CS	505	25	450	149	16	22	460	25	50	4	8	M12 x 140
378	DI	505	25	470	149	16	22	460	25	50	4	8	M12 x 140
408	CS	565	25	500	149	16	26	515	25	50	4	8	M12 x 140
429	DI	565	25	521	149	16	26	515	25	50	4	8	M12 x 140
459	CS	615	25	551	149	20	26	565	25	50	-	10	M12 x 140
480	CS	615	25	572	149	20	26	565	25	50	5	10	M12 x 140
510	CS	670	25	602	149	20	26	620	25	50	-	10	M12 x 140
532	DI	670	25	624	149	20	26	620	25	50	5	10	M12 x 140
612	CS	780	25	704	149	20	30	725	25	50	-	10	M12 x 140
635	DI	780	25	727	149	20	30	725	25	50	5	10	M12 x 140
713	CS	895	25	805	149	24	30	840	25	50	-	12	M12 x 140
738	DI	895	25	830	149	24	30	840	25	50	6	12	M12 x 140
815	CS	1015	25	907	149	24	33	950	25	50	-	12	M12 x 140
842	DI	1015	25	934	149	24	33	950	25	50	6	12	M12 x 140
916	CS	1115	25	1008	149	28	33	1050	25	50	-	14	M12 x 140
945	DI	1115	25	1059	179	28	33	1050	25	50	7	14	M16 x 160
1018	CS	1230	25	1132	179	28	36	1160	25	50	-	14	M16 x 160
1048	DI	1230	25	1162	179	28	36	1160	25	50	7	14	M16 x 160
1221	CS	1455	38	1335	192	32	39	1380	25	50	-	16	M16 x 160
1255	DI	1455	38	1369	192	32	39	1380	25	50	8	16	M16 x 160